





Optional Hat Section

BASED ON 3rd Edition 2005 SMACNA STANDARDS

Standard symbols now reflect the proper designation for showing duct liner on drawings. Duct dimensions designate net free area.

Acoustical Lining Duct Dimensions
for NET Free Area

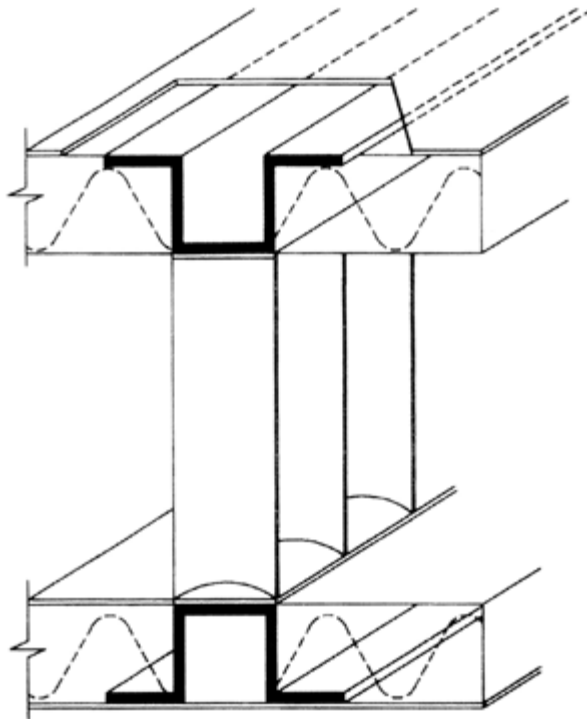

*HAT section used as insulated “Build Out.” Build Out is attached to duct with sheet metal screws, bolts, or welds.

*usage range 4001 FPM (20.3 mps) – 6000 FPM (30.5 mps)

Vanes and dampers must be insulated in a manner that will not disrupt liner, restrict damper operation, or increase friction loss.

Sales & Estimating: Drew McCaffrey • Drew.McCaffrey@ZENIndustries.com • 877-600-0274 • Fax: 877-826-7952

Regional Sales Manager: Al Burling • al.burling@zenindustries.com • 517-290-1050

Accounting & Billing: Kim Zenisek • Kim@ZENIndustries.com • 888-415-4822 • Fax: 216-432-3241

ZEN Industries, Inc. • 2340 East 69th Street, Unit #2 • P.O. Box 604394 • Cleveland, OH 44104